

电磁继电器系列 Electromagnetic relay series


- 10A Transfer Contacts
- Indicator LED
- Various Terminal Types
- Various Terminals Sockets

MUJIE-INT


触点额定值 Contact Ratings

	2Z	4Z	L2Z	
Contact Ratings	2Z	4Z	L2Z	
Contact Resistance	50m Ω (1A 6VDC)	50m Ω (1A 6VDC)	50m Ω (1A 6VDC)	
Contact Capacity	5A/250VAC 30VDC	3A, 5A/250VAC 28VDC	10A/250VAC 30VDC	
规格 Specification				
Insulation Resistance	500MQ(500VDC)	500MQ(500VDC)	500MQ(500VDC)	
Dielectric Strength	BCC ≥1500VAC 1min	BCC ≥1500VAC 1min	BCC ≥1500VAC 1min	
	BOC ≥1000VAC 1min	BOC ≥1000VAC 1min	BOC ≥1000VAC 1min	
	COC ≥1500VAC 1min	COC ≥1500VAC 1min	COC ≥1500VAC 1min	
Operate Time	25ms/15ms	25ms/15ms	25ms/15ms	
技术参数 Technical Parameter				
Coil	Rated Voltage	DC6-220V AC6-380V	DC6-220V AC6-380V	DC6-220V AC6-380V
	Rated Power	DC≤0.9W AC≤1.2VA	DC≤0.9W AC≤1.2VA	DC≤0.9W AC≤1.2VA
Electrical Life	10 ⁵ OPS	10 ⁵ OPS	10 ⁵ OPS	
Mechanical Life	10 ⁷ OPS	10 ⁷ OPS	10 ⁷ OPS	
Operating Temperature	-40~70	-40~70	-25~55	
Weight	≤32g	≤35g	≤34g	
Mounting Methods	Printed-circuit Board, Flange, Outlet	Printed-circuit Board, Flange, Outlet	Printed-circuit Board, Flange, Outlet	

安装尺寸图 Dimensions

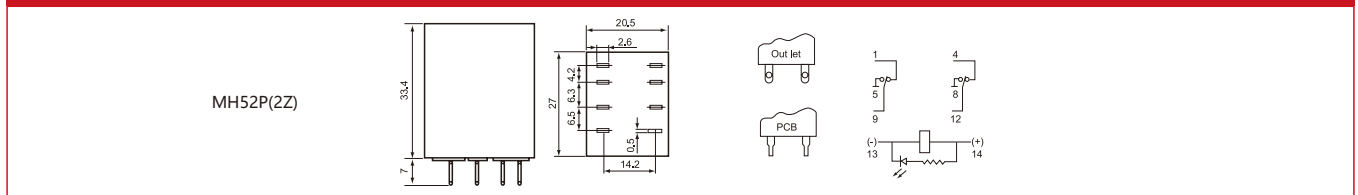

安装尺寸图 Dimensions

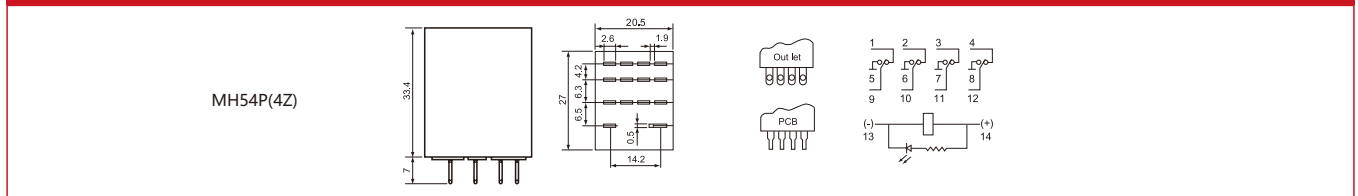

安装尺寸图 Dimensions

