

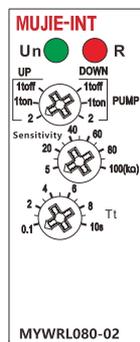
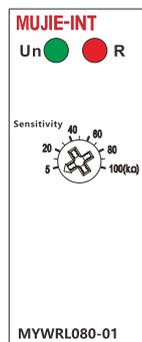


# MUJIE-INT<sup>®</sup>

## Liquid level control relay MYWRL080-01/02 series

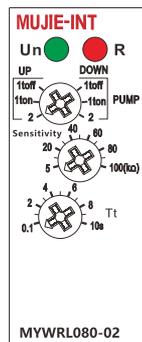

### Panel Diagram

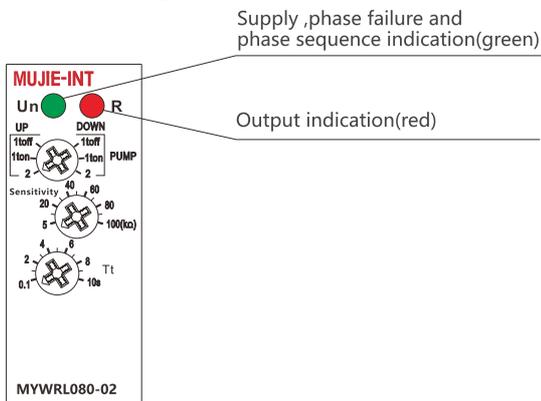

### General


#### ■ Applications

-Designed for monitoring level in wells, basins, reservoirs, tanks.....

#### ■ Function Features

- In one device you can choose the following configurations:
  - 2 level control mode
  - 1 level control mode
- Choice of function PUMP UP, PUMP DOWN.
- Adjustable time delay on the output (0.1 - 10s).
- Sensitivity adjustable by a potentiometer (5-100kΩ).
- Galvanically separated supply voltage AC/DC 24-240V.
- Relay status is indicated by LED.
- 1-MODULE, DIN rail mounting.

#### ■ Model and connotation

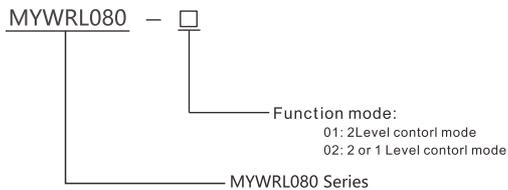


### Technical parameters

| Model                            | MYWRL080-01  | MYWRL080-02               |
|----------------------------------|--|---------------------------|
| Function                         | 2 level control mode                                       | 2 or 1 level control mode |
| Supply terminals                 | A1-A2  |                           |
| Voltage range                    | AC/DC 24-240V(50-60Hz)                                     |                           |
| Input                            | max.2VA  |                           |
| Supply voltage tolerance         | -15%;+10%  |                           |
| Sensitivity ( input resistance)  | adjustable in range 5 kΩ -100 kΩ                           |                           |
| Voltage in electrodes            | max. AC 5 V  |                           |
| Current in probe                 | AC <0.1 mA   |                           |
| Time response                    | max. 400 ms  |                           |
| Max. capacity length             | 800 m (sensitivity 25kΩ), 200 m (sensitivity 100 kΩ)       |                           |
| Max. capacity of probe cable     | 400 nF (sensitivity 25kΩ), 100 nF (sensitivity 100 kΩ)     |                           |
| Time delay (t)                   | adjustable, 0.1 -10 s                                      |                           |
| Accuracy in setting (mechanical) | ± 10 %   |                           |
| Temperature coefficient          | 0.05%/°C, at=20°C(0.05%/°F, at=68°F)                       |                           |
| Output                           | 1×SPDT   |                           |
| Current rating                   | 10A/AC1  |                           |
| Switching voltage                | 250VAC/24VDC   |                           |
| Min.breaking capacity DC         | 500mW  |                           |
| Output indication                | red LED  |                           |
| Mechanical life                  | 1×10 <sup>7</sup>  |                           |
| Electrical life(AC1)             | 1×10 <sup>5</sup>  |                           |
| Reset time                       | max.200ms  |                           |
| Operating temperature            | -20°C to +55°C (-4°F to 131°F)                             |                           |
| Storage temperature              | -35°C to +75°C (-22°F to 158°F)                            |                           |
| Mounting/DIN rail                | Din rail EN/IEC 60715                                      |                           |
| Protection degree                | IP40 for front panel/IP20 terminals                        |                           |
| Operating position               | any  |                           |
| Overvoltage category             | III.   |                           |
| Pollution degree                 | 2  |                           |
| Max.cable size(mm <sup>2</sup> ) | solid wire max.1×2.5or 2×1.5/with sleeve max.1×2.5(AWG 12) |                           |
| Dimensions                       | 90×18×64mm   |                           |
| Weight                           | 61g  | 81g                       |
| Standards                        | EN 60255-1   |                           |


## Functions Diagram

### MYWRL080-01

- 2 level control

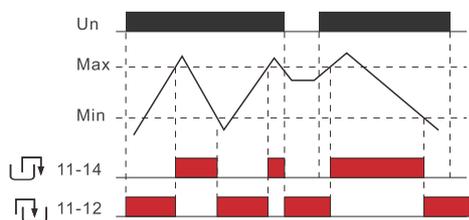


- 1 level control (pump down t off)

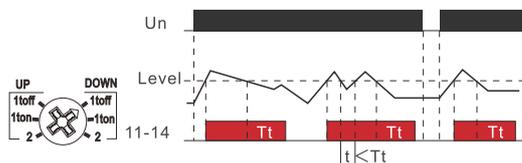


### MYWRL080-02

- 2 level control (pump up/down)


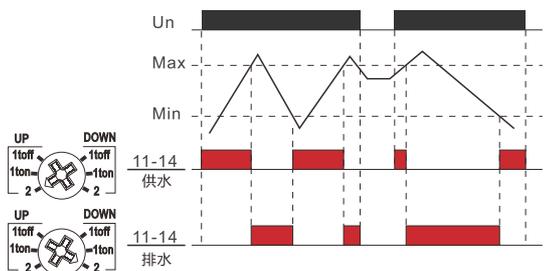


## Wiring Diagram


- 2 level control

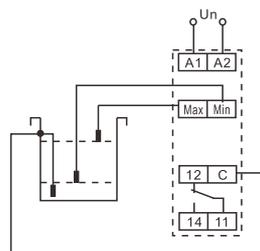


- 1 level control

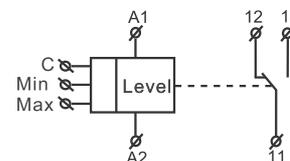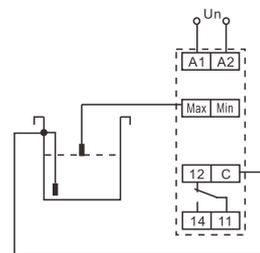


- 1 level control (pump up t on)

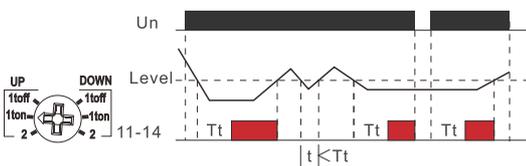


- 1 level control (pump up t off)

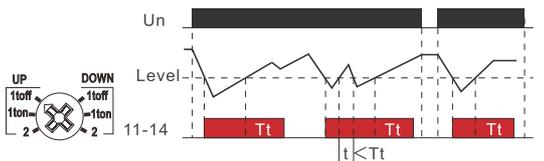

- 1 level control (pump down t on)

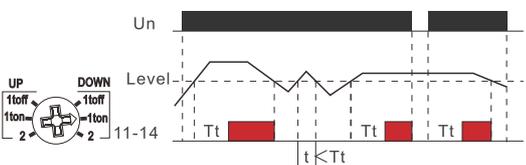

## Dimensions (mm)

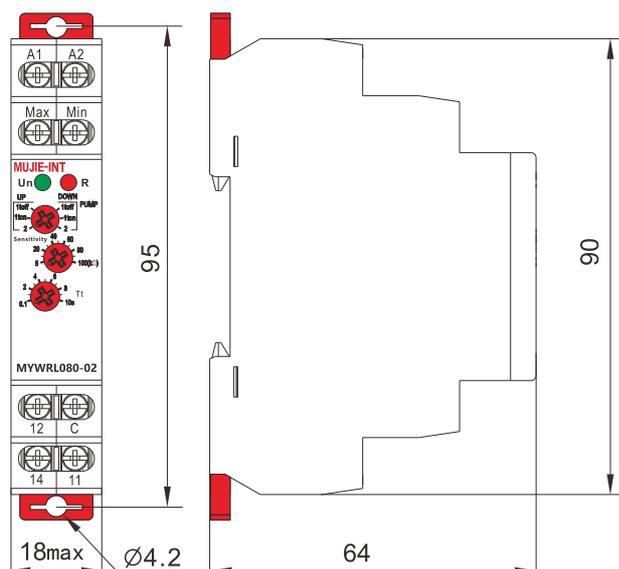

# MUJIE-INT®



Disposal of Electrical Waste  
All electrical waste should be  
disposed of in compliance with  
current WEEE regulations.



Caution  
The products must be installed by qualified electricians. All and  
any electrical connections of the product shall comply with  
the appropriate safety standards.